





# Technical information: King pins




We are pleased to announce new, increased D-values for king pins 1006 to 1016. Please refer to the table below for details.

By using a quality controlled torque wrench it is possible to assemble the king pins using a higher torque in order to obtain an optimum pre-tension of the bolts.

Please observe the new torque settings shown below and make sure that only original spare parts are used, as otherwise the type approval and guarantee are invalidated. Further details can be found in the installation and operating instructions.

	D-Value		Kit 	 Nm
KZ 1006	162 kN	KZE 1012-03 M14 x 35	KZ 1012-006	<b>190</b> +/-10
KZ 1007	162 kN	KZE 1012-03 M14 x 35	KZ 1012-006	<b>190</b> +/-10
KZ 1008	162 kN	KZE 1012-03 M14 x 35	KZ 1012-006	<b>190</b> +/-10
KZ 1010	162 kN	KZE 1012-03 M14 x 35	KZ 1012-006	<b>190</b> +/-10
KZ 1012	162 kN	KZE 1012-03 M14 x 35	KZ 1012-006	<b>190</b> +/-10
KZ 1410	162 kN	KZE 1012-03 M14 x 35	KZ 1012-006	<b>190</b> +/-10
KZ 1412	162 kN	KZE 1012-03 M14 x 35	KZ 1012-006	<b>190</b> +/-10
KZ 1416	200 kN	KZE 1416-03 M16 x 45	KZ 1416-005	<b>280</b> +/-15
KZ 2816	152 kN	KZE 1416-03 M16 x 45	KZ 1416-005	<b>280</b> +/-15
KZ 1016	280 kN	KZE 1016-06 M20 x 50	KZ 1016-010	<b>500</b> +/-30
KZ 1516	162 kN	KZE 1016-06 M20 x 50	KZ 1016-010	<b>500</b> +/-30

For safety reasons, we recommend using the bolts once only

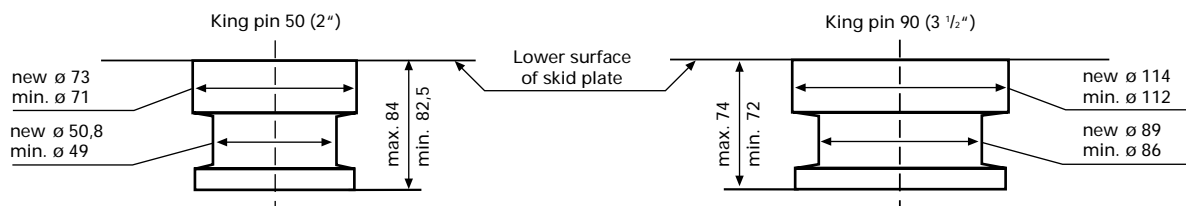

ZDE 198 006 020 - 07/2000

# JOST